



Flooring Compounds

Subfloor Levelling & Self Smoothing Compounds

Wearing Course Toppings

Screed Admixtures / Rapid Drying Screeds

Fast Track Floor Repairs

Floor Coatings / Deck & Balcony Coatings

Flooring Accessories & Cleaning Aids

Subfloor Levelling & Self Smoothing Compounds



Size
22kg + 4.8ltr

Arditex NA

Award-winning latex levelling compound can be used on almost any substrate without priming, including bitumen and adhesive residues, tiles and flooring grade plywood. Receives floor coverings in just 4 hours. Apply feather edge-30mm thickness. Suitable for underfloor heating. For internal use only.

Coverage: 5m² @ 3mm thickness



Size
22kg + 4.8ltr

Arditex

Ultra fast setting sub-floor smoothing compound, can apply floor coverings after 4 hours and is suitable to use over most old adhesive residue, and under DPM's.

Coverage : 5m² @ 3mm thickness




Size
25kg + 5ltr

Mapei Latexplan Trade

Two-part self leveling and smoothing compound that consists of special cements, graded silica sands and additives with a synthetic rubber latex. For leveling 1-10mm in one application. Can be walked on in 1.5-2 hrs and will receive flooring in 12 hours.

Coverage : 6m² @ 3mm thickness



Size
25kg

SikaFloor Level 30


One component, polymer modified, versatile and durable, pumpable, cementitious screed subfloor which can be applied manually or by pump to achieve rapid, flat, economic substrate levelling prior to the application of the final floor finish.

Coverage : 4.6m² @ 3mm thickness

ARDEX K 11

Free flowing rapid hardening levelling and smoothing compound for a range of subfloors including cement/sand screeds, gypsum screeds, concrete and traces of adhesive residues. Can be walked on in just 2 ½ hours and receives floor coverings after 16 hours. Suitable for underfloor heating. For internal use only.

Coverage: 7m² @ 2mm thickness

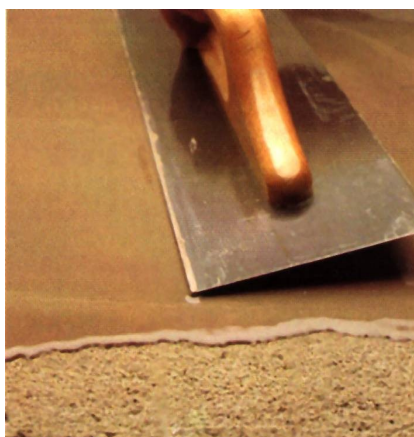

Size
25kg

Ultrafloor Level iT Base

For smoothing and levelling internal floors at 2-50mm depth on irregular substrates, prior to the application of a decorative covering. Suitable for most common substrates and fixed over-boarded wooden floors where movement is unlikely. Protein free and suitable for use with underfloor heating.

Coverage: 5m² @ 3mm thickness

Size
25kg

Mapei Ultraplan

Single Component, leveling and self smoothing compound for leveling 1-10mm in one application. Ultra fast drying, ready to receive flooring in 12 hours. It can be pumped or hand applied.

Coverage : 6m² @ 3mm thickness

Flexcrete Cemprotec E-Floor

A major advancement in flooring technology incorporating the benefits of copolymer and epoxy resin technologies into a self smoothing, rapid hardening, water based, cementitious system. Gives a hard, durable 1.5-3mm thick coating with excellent resistance to abrasion, water, chloride ions and aggressive chemicals for the protection of concrete floors in the most demanding environments. Can be used internal and externally.

Coverage: 8.1m² @ 2mm thickness

Mapei Ultratop

Single Component, abrasion resistant industrial floor topping which is self leveling from 5 - 40mm in one application. Ultra fast setting. It can be pumped or hand applied. Internal use only.

Coverage: 3m² @ 5mm thickness

Ardex K80

Rapid drying industrial topping / wearing surface. Withstands heavy wheeled traffic and had excellent abrasion resistance. Can be applied from 5 -12mm over existing concrete surfaces. Internal use only.

Coverage: 3m² @ 5mm thickness

Cemflow Exterior Topping

Self smoothing topping which allows external areas to be resurfaced and allows wheeled vehicles to traffic the surface after only 48 hours. Can be applied from 5– 15mm in one application. Can be used internally and externally.

Coverage: 3m² @ 5mm thickness

Parex SBR Friction Coat

A Portland cement based powder containing hard irregular aggregate and a modified styrene butadiene latex gauging liquid. Used for thin overlay applications, 3-5mm, to trafficked concrete surfaces to increase surface friction creating a anti-skid surface. Also suitable for evening out surface irregularities to concrete floors exhibiting rain damage when poured.

Coverage: Refer to data

Ardex K301

Fast setting, internal and external levelling compound. Ideal for paths, drives, court yards and parking areas. Walkable after only 2 hours and can withstand light vehicular traffic after on 48 hours. Applied from 2-20mm thickness.

Coverage: 7.8m² @ 2mm thickness

Size
30kg




Size
25kg

Size
25kg

Size
25kg

Size
27.5kg

Size
25kg

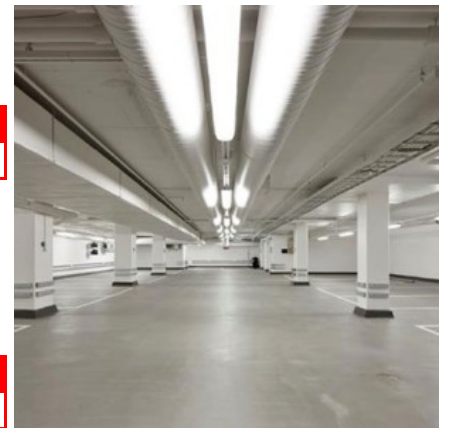

Flexcrete Fastfill

Rapid setting, Portland cement-based structural mortar for the durable repair of concrete which cannot be taken out of service for long periods, or in areas subjected to heavy wear such as roads, runways, bridges, decks, floors and footpaths. Sets in 10 minutes at 20°C yielding a durable, high strength mortar. Complies **DTp Standard** (BD 27/86) **BBA, WRAS** and **DWI** approved product.

Yield: 13.3ltr = 1m² @ 13.3mm thickness

Size

25kg



Size

25kg

Sika®Screed HardTop-80

Soft plastic consistency, polymer modified, fast curing, rapid load bearing and over coatable, horizontal levelling mortar that is designed for application in a minimum layer thickness of 8 mm. It is almost shrinkage-free during hardening and curing, plus it has very high abrasion resistance and compressive strength.

Yield: 11.9ltr = 1m² @ 11.9mm thickness

Size

25kg



Sika Rapid Repair Mortar

Fast setting cementitious repair mortar idea for floor slabs where an early high strength repair is required. Also suitable for bedding of manhole covers.

Yield: 11.9 ltr = 1m² @ 11.9mm thickness

Size

25kg



FEBSET 45

Specially formulated repair mortar, based on magnesia-phosphate pre-mixed with selected aggregates, which gives controlled, extremely high early strengths in temperatures ranging from -20°C (or lower) up to over 30°. Ideal for freezer room and temperature controlled areas.

Yield: 11.6 ltr = 1m² @ 11.6mm thickness

Size

25kg

Parex Speedcrete S Acrylic

A fine, quick setting, rapid hardening concrete incorporating ASR resistant 6mm aggregate and a dispersible acrylic polymer powder. Strength gain of 25N/mm² in 2 hours. Mixed consistency of "mobile concrete" suitable for downward facing holes, in concrete roads, runways, bridge decks etc. Complies with **DTp Standard** (BD 27/86) Materials for the . **L.U.L** approved product.

Yield: 12 ltrs = 1m² @ 12mm thickness

Size

11kg



Ardex Ardurapid A45

Ideal for rapid repairs of internal concrete, screeds, renders and concrete stops. Receives finishes after 90 minutes regardless of thickness. Slump free - Ideal for vertical and horizontal repairs.

Yield: 7ltrs = 1m² @ 7mm thickness

Floor Coatings / Deck & Balcony Coatings



Size

30kg

Flexcrete Cemprotect E-Floor

A major advancement in flooring technology incorporating the benefits of copolymer and epoxy resin technologies into a self smoothing, rapid hardening, water based, cementitious system. Gives a hard, durable 1.5-3mm thick coating with excellent resistance to abrasion, water, chloride ions and aggressive chemicals for the protection of concrete floors in the most demanding environments. Can be used internal and externally.
Coverage: 8.1m² at 2mm



Size

5kg

10kg

DCP Strongcoat HB

A two-pack solvent free, epoxy-based coating which provides floor surfaces with a seamless, hygienic and cosmetically attractive finish. Ideal for light to medium duty areas. Applied by roller in two coats. Has very good durability towards pedestrian and vehicular traffic. It also has very good resistance towards many of the chemicals commonly found in an industrial environment. Available in a wide range of colours.
Coverage: 4m² per kg per coat

DCP Strongcoat WD

A two-pack solvent free, water-based, epoxy-based coating which provides floor surfaces with a seamless, hygienic and cosmetically attractive finish. Applied by roller in two coats. Has very good durability towards pedestrian and vehicular traffic. It also has very good resistance towards many of the chemicals commonly found in an industrial environment. Available in a wide range of colours.
Coverage: 8m² per kg per coat



Size

10kg

20kg

SikaFloor 261

Two part, chemical resistant and abrasive resistant coating suitable for car park decks, warehouse floors and production areas. Easy applied in two coats by brush or roller. Slip resistance can be achieved. *Coverage: Refer to data*




Size

15 ltr

Roofdex HB

Suited for both refurbishment and new build projects, with compatibility to a wide range of roofing substrates including asphalt, felt and cementitious roofs. A range of systems can be created; it can be used unreinforced for the ultimate in cost-effective waterproofing, or it can be reinforced with various grades of glass fibre matting systems to provide long-term weatherproofing. It is available in solar reflective white to reduce energy consumption, as well as reducing air conditioning costs. Supplied as a single pack product.
Coverage: Refer to data

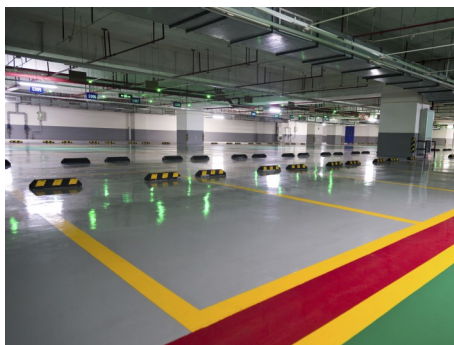

Direct Chemicals are able to offer a full range of car park decking, balcony coatings and podium decking systems. Including MMA systems, high performance epoxy coatings and modified cements. For further information and written specifications please contact our office. We have solutions to meet every requirement and budget.

Floor Accessories

Skid Leveller Complete with Handle

Used to spread floor coatings, the pins are adjustable to allow for the correct thickness of material to be placed.

Size
Each



12" Spiked Roller with Handle

Roller with spikes designed to remove air bubbles trapped in floor coatings and smoothing compounds.

Size
Each



12" Floor Squeegee with Handle

Spreading of primers and pushing around floor compounds.

Size
Each



Spiked Overshoes

Slips directly over your existing footwear. One size fits all.

Size
Pair



DiChem Foam Tapes

Used to create an edge or control levelling compounds to the areas being applied to.

Available in a variety of sizes and types:- HxWxL

Type 1- Black, Polyethylene, 6mm x 12mm x 10m

We are able to supply other sizes to order please enquire.

Size

6 x 12mm x 10m



Cleaning Aids

DiChem Alfanol HD

A biodegradable powerful water based penetrating cleaner particularly suited to the removal of grease, diesel and oil from hard surfaces such as concrete, plant, vehicles etc.

Size
25 ltr

DiChem Con-Rem

Suitable for etching concrete and cleaning prior to application of coatings. Normally diluted with 4-6 parts water in use and applied by brush or spray. Concentration 28% Hydrochloric Acid.

Size
25 ltr



Notes